


JET TENDER® 14

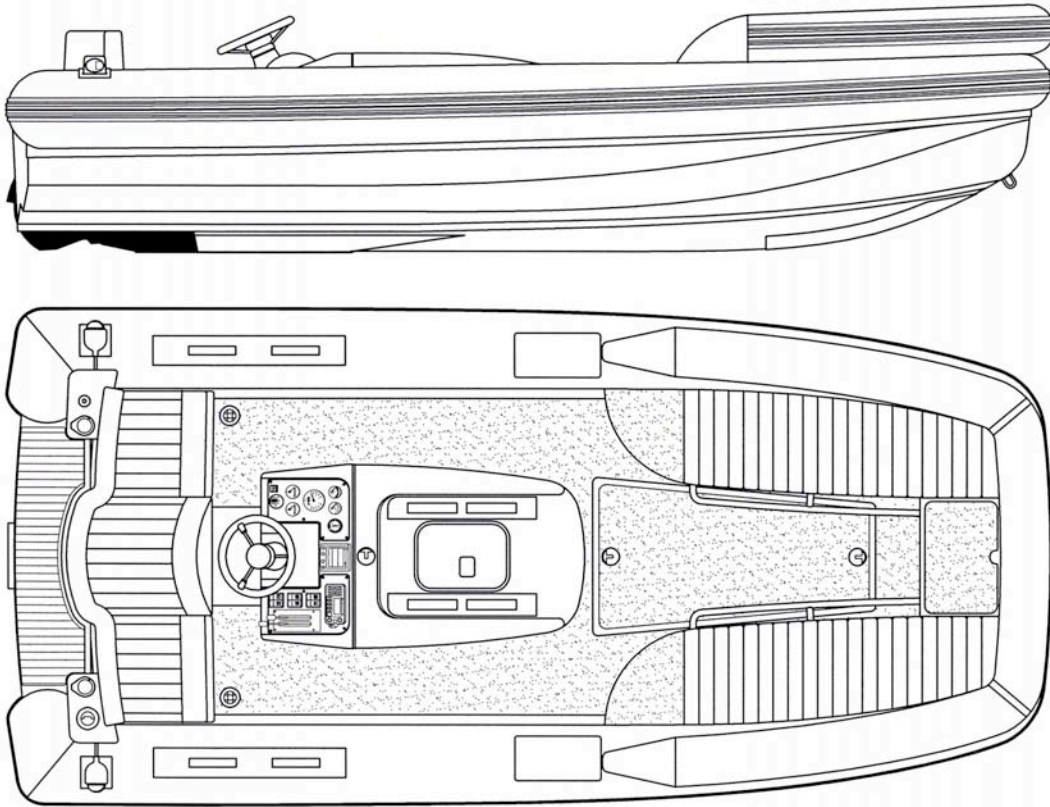

DIMENSIONS

Length o.a.:	4,20 m.
Beam max.:	2,00 m.
Height max.:	1,00 m.
Height max. for storage (with B.I.S.S. deflated and folded console):	0,80 m.
Diameter inflatable tubes (at stern):	0,32 m.
Independent tube's compartments:	No. 5 + B.I.S.S.
Seat placements:	No. 7
Passengers capability (C.E. directive):	No. 7
Design category (C.E. directive):	C

STANDARD EQUIPMENT

Engine: Yanmar marine diesel engine type *4JH4-HTE* developing 110 HP @ 3.200 rpm, 4L cylinders, 2.190 cc displacement, equipped with twin circuit cooling system and stainless steel marinemounts.

Drive: Waterjet unit Castoldi type *Jet 05* equipped with Durethan impeller, integrated gearbox, mechanical disconnecting clutch, movable debris screen grid on water intake, all oil lubricated bearings - Kit for fresh water cooling the engine's raw water circuit.

Matching system: C.V. joint

Controls: Sea Star hydraulic steering system with stainless steel steering wheel - Single lever box for engine's throttle control with integrated switch for electric/hydraulic reversing deflector control - Knob for the control of the mechanical disconnecting clutch - Handle for the control of the debris screen grid.

Electrical: 12 V free maintenance, hermetic battery - One main switch - Navigation lights - Led courtesy deck lights - 12V accessory socket - Electric horn - Automatic electric bilge pumps - All electrical system fitted with fuses and circuit breakers - All sealed electrical connections - Console folding electric system with No. 1 ram.

Dashboard with instruments: Starting key - Engine’s instruments - Watertight switches - Reversing deflector position gauge - Safety engine stop - Fuel level gauge

Lifting and towing: No. 1 recessed single point lifting hook - No. 3 towing eyes (1 bow, 2 transom) - Ski tow.

Fuel system: Under-deck stainless steel fuel tank, 62 lts capacity with on-deck fill and vent - Fuel shut-off solenoid valve - Racor fuel-water separator filter.

Exhaust system: Stainless steel pipe with integrated muffler.

Seating: No. 4 seats on fore benches - No. 3 seats on aft bench.

All cushions and backrests in white leather-like upholstery with inspectionable encapsulated soft foam.

General: Transom platform teak laid - Stainless steel telescopic ladder with No. 3 teak steps - Bow and stern grab rails - Keel protection (replaceable) - Waterproof console cover - Engine room air intakes - B.I.S.S. (bow inflatable spray shield) - Kit for tubes’ emergency repair - Air pump, manual - Fire extinguisher - Pair of paddles - Owner manual - Engine’s hatch - Engine room’s acoustic and thermal insulation - Under seats storage lockers.

Standard colours: White *tubes* - light grey, navy blue or black *fender on tube* - white *hull, console, deck, engine hatch* - white *cushions* - white *rain/spray dodger, boat cover*.

Boat is delivered protected by fabric cover and positioned on wooden cradle

OPTIONAL EQUIPMENT

Canvas

- Bimini top transom
- Boat cover.....
- Spray dodger.....

Colours, Writings and Matherials

- Custom hull colour
- Custom deck colour.....
- Custom tube colour, single or bi-colour
- Custom upholstery colour
- Custom rain/spray dodger colours.....
- No. 2 writings “**TENDER TO....**” made on Hypalon-Neoprene coated fabric vulcanized on both sides with customized graphics.....
- Upholstery and canvas in Sunbrella fabric with requested colour

Interior

- Bow cushioned section for sunpad layout.....
- Customized lifting eyes
- Dive tank holder
- Rod holders.....

Teak

- Teak decking (8 mm, solid).....

Navigation - Electronics - Lights

- Batteries’ charger with A.C. stainless steel power inlet
- Depthsounder/Fishfinder Garmin ”ECHO 300 C”
- GPS Map/Depthsounder Garmin “521 S”
- Inflator/Deflator (portable) 12 V flow rate 1000 l/min
- No. 2 underwater transom lights (LED)
- Portable watertight search light
- MP3/Ipod socket with holder, amplifier and N. 2 speakers
- Second independent battery for services with temporarily parallel switch
for engine starting and charger/splitter selector (necessary in case of electric optionals).....
- VHF, waterproof, class D, DSC,
with all U.S. and International frequencies ; with aerial

Safety

- Anchor, Danforth type, Kg, 5, made of polished stainless steel,
with chain 2,00 m long and rope 15,00 m. long
- Kit of engine’s spare parts
- Kit of waterjet unit’s spare parts
- Rescue boat package (to comply with MCA rules) for yachts under 500 GT *
- Satellite tender tracking system (internet accessible)

General

- Antiskid stripes on tube’s walking area
- Deck shower with pressurized fresh water
system and 55 lt. water tank (Kg. 7,6)
- Mooring whips eyes
- No. 2 bow/side towing eyes
- No. 4 lifting eyes

* Portable watertight search light must be ordered too for completing the rescue boat package